

Powering


Steps

1. Wire power
2. Toggle on switch.

1) Wire

EAC Controllers use 24VAC power.

Connectors are the right bottom left of the controller.

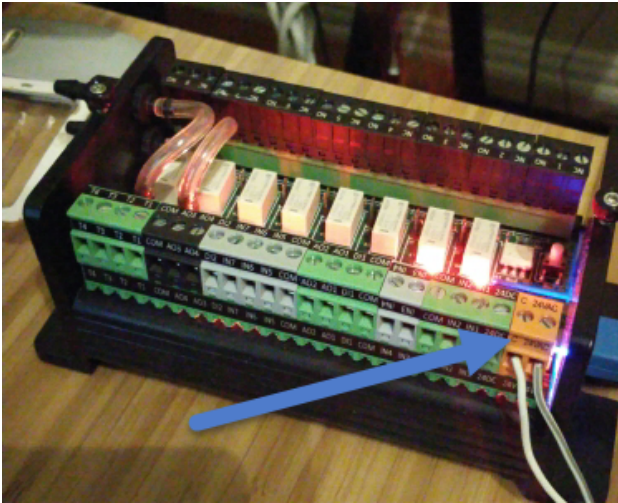

2) Toggle On Switch

Toggle switch is located on the same side as the ethernet port.

Slide the switch and wait for the lights to flash.

